

c:\pw-work\dm500753\Std635-2.dgn [Std 635-2]
3 June 2024 10:08 AM

PROJECT	SHEET NUMBER

NOTE:


1. To substitute raised pavement markers for lines, use the following patterns:

2 ft broken line: two pavement markers spaced 2 ft apart allowed by the gap shown based on curvature.


Single solid line: pavement markers spaced on 10 ft centers.

Double solid line: two pavement markers, side by side, spaced on 10 ft centers.


2. On two- or three-lane roads, signs may be used instead of temporary pavement markings as shown on Standard 635-3.

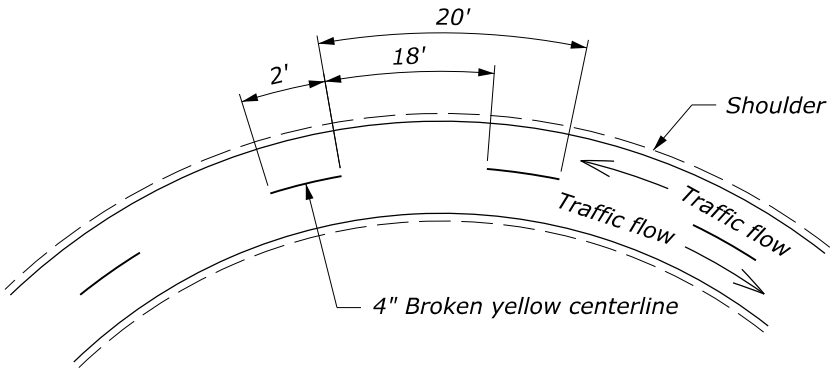


DETAIL A1
Passing zone both directions
Two-way traffic

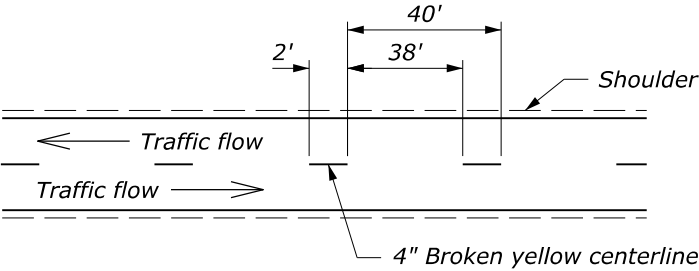


DETAIL B1
Passing zone both directions
Two-way traffic

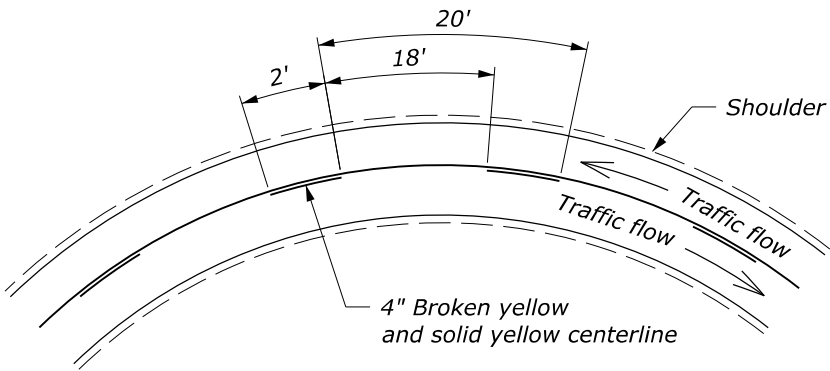


DETAIL A2
No passing zone one direction
Two-way traffic

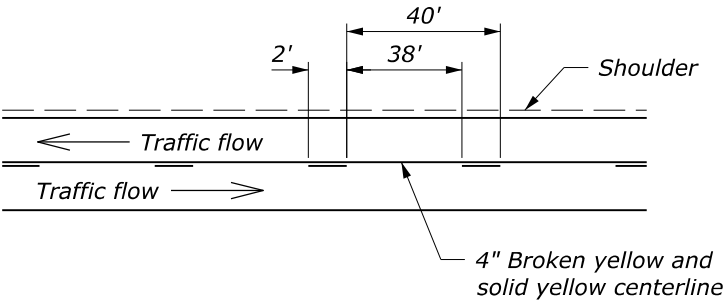

DETAIL B2
No Passing zone one direction
Two-way traffic

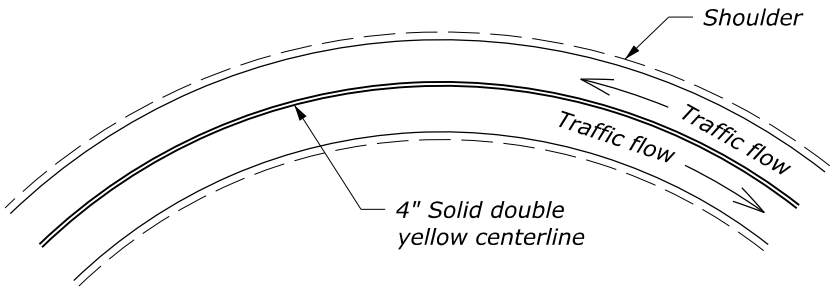

DETAIL A3
No passing zone both directions
Two-way traffic

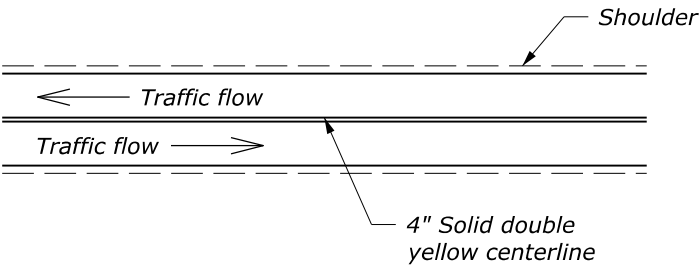

DETAIL B3
No Passing zone both directions
Two-way traffic

DETAIL A
Curves < 500' Radius

DETAIL B
Tangents or Curves ≥ 500' Radius

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD 635-2
TEMPORARY PAVEMENT MARKINGS	SPECIFICATION FP-24, FP-14 APPROVED FOR USE 2/2024

NOTE:


1. To substitute raised pavement markers for lines, use the following patterns:

0.6 m broken line: two pavement markers spaced 0.6 m apart allowed by the gap shown based on curvature.


Single solid line: pavement markers spaced on 3 m centers.

Double solid line: two pavement markers, side by side, spaced on 3 m centers


2. On two- or three-lane roads, signs may be used instead of temporary pavement markings as shown on Standard M635-3.

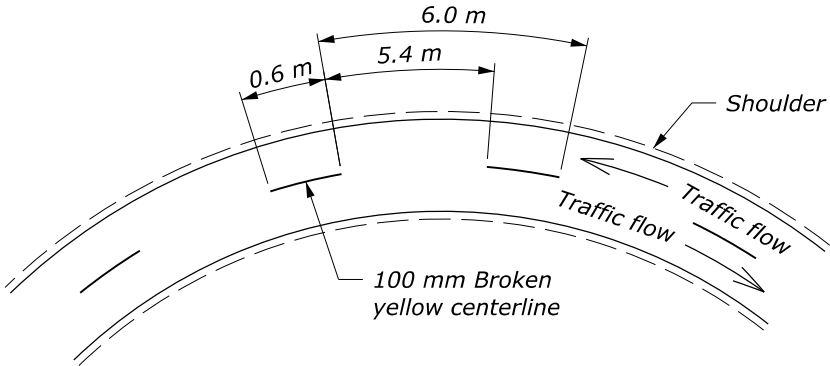


DETAIL A1
Passing zone both directions
Two-way traffic

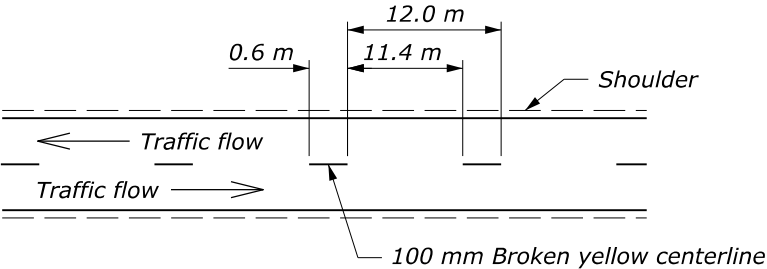


DETAIL B1
Passing zone both directions
Two-way traffic

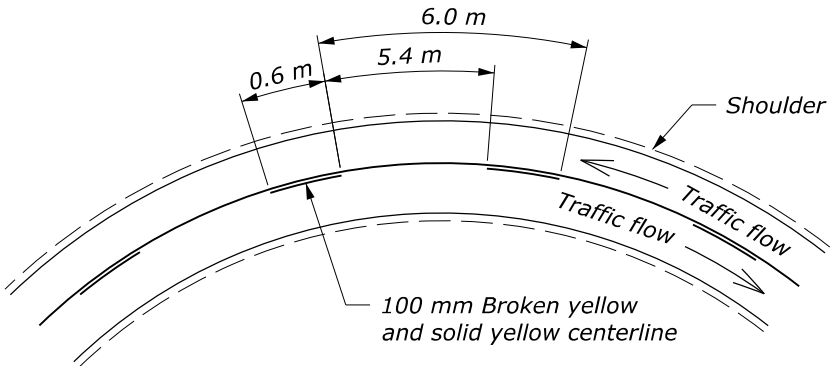


DETAIL A2
No passing zone one direction
Two-way traffic

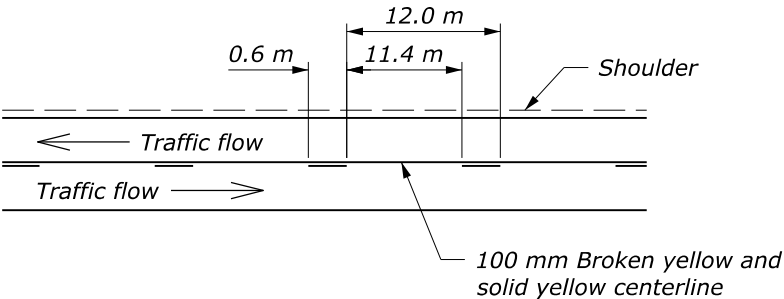

DETAIL B2
No Passing zone one direction
Two-way traffic

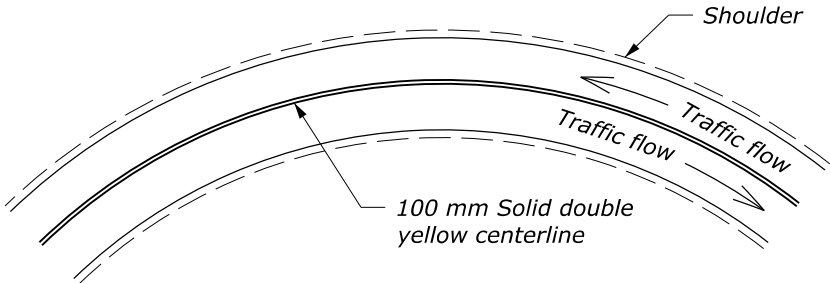

DETAIL A3
No passing zone both directions
Two-way traffic

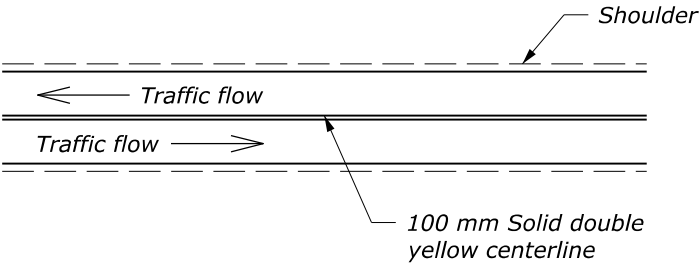

DETAIL B3
No Passing zone both directions
Two-way traffic

DETAIL A
Curves < 150 m Radius

DETAIL B
Tangents or Curves ≥ 150 m Radius

This drawing contains **Metric** units of measure.
Dimensions without units are millimeters.

U.S. DEPARTMENT OF TRANSPORTATION, FHWA OFFICE OF FEDERAL LANDS HIGHWAY	FLH STANDARD M635-2
TEMPORARY PAVEMENT MARKINGS	SPECIFICATION FP-24, FP-14
	APPROVED FOR USE 2/2024

NO SCALE